

GARMENT TRANSPORT



Load-Lok garment rails can be supplied compatible for all track and panel systems in use and are suitable for all types of hanging clothing. The main hanger rail of the Load-Lok garment rail is produced with a special high quality chromium finish. Alternative surface treatments are available on request, including electro zinc plating.

GARMENT RAIL for GTS PANEL



 Extending Type		 Non-Extending Type		 95 mm		
Dimensions		Material	Type	Carrying Capacity	Weight	Suitable for GTS panel + high density GTS
Toprail	Hanger Rail					
15	35	High Yield Steel Chromium or ZincPlated	Pull Spring	300 kg.	7 kg.	

GARMENT RAIL FOR KEYHOLE PANEL


 full-capacity		 standard		 95 mm		
Dimensions		Material	Type	Carrying Capacity	Weight	Suitable for Key Hole Panel
Toprail	Hanger Rail					
15	35	High Yield Steel Chromium or ZincPlated	Pull Spring	300 kg.	7 kg.	

GARMENT RAIL FOR SALWALL PANEL

 		 95 mm				
Dimensions		Material	Type	Carrying Capacity	Weight	Suitable for SALWALL panel
Toprail	Hanger Rail					
15	35	High Yield Steel Chromium or ZincPlated	Standaard + duwveer	300 kg.	7 ⁵ kg.	



GARMENT TRANSPORT

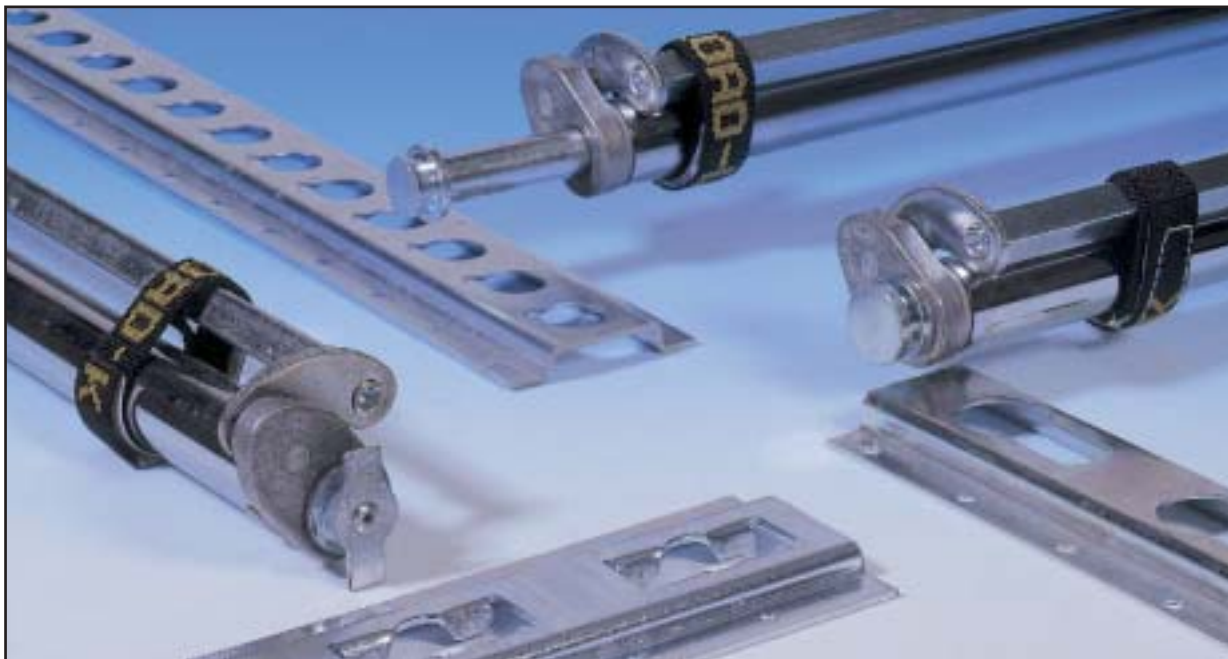

Load-Lok garment rails can be supplied compatible for all track and panel systems in use and are suitable for all types of hanging clothing. The main hanger rail of the Load-Lok garment rail is produced with a special high quality chromium finish. Alternative surface treatments are available on request, including electro zinc plating.

GARMENT RAIL FOR 1806 TRACK



				95 mm		
Dimensions		Material	Type	Carrying Capacity	Weight	Suitable for 1806 Track
Toprail	Hanger Rail					
∅ 15	∅ 35	High Yield Steel Chromium or ZincPlated	Standard + Push Spring	300 kg.	7 kg.	

GARMENT RAIL FOR 1803 TRACK

				95 mm		
Dimensions		Material	Type	Carrying Capacity	Weight	Suitable for 1803-H and 1803-V
Toprail	Hanger Rail					
∅ 15	∅ 35	High Yield Steel Chromium or ZincPlated	Standaard, without Springs	300 kg.	7 kg.	

GARMENT RAIL FOR 2010 TRACK

				95 mm		
Dimensions		Material	Type	Carrying Capacity	Weight	Suitable for 2010 and 3009
Toprail	Hanger Rail					
∅ 15	∅ 35	High Yield Steel Chromium or ZincPlated	Standard + Push Spring	300 kg.	7 kg.	







CARGO RESTRAINT SYSTEMS

Transportutstyr AS
Tlf.nr. +47 63 87 10 80
www.transportutstyr.no




GARMENT TRANSPORT




GTS PANELS

Load-Lok GTS panels are available in many variations and are designed to meet the individual requirements of the customer. Standard GTS panels are 3mm thick anodised aluminium. 2mm thick mild steel zinc plated panels are also available. The chart below details the 'Standard' panel sizes and pitch. Please note that all panels can be supplied with or without kick plate and fixing holes. In addition, our CNC facility allows complete design flexibility and enables us to produce standard rectangular and 'shaped' panels up to 1.5 metre wide with varying hole density (pitch) and design. **Our new High Density GTS panel which is not shown below increases the available garment rail positions by some 40%.** GTS Panels should be installed allowing a minimum gap of 25 mm between the rear of the panel and the trailer wall to ensure easy insertion and removal of the garment rail.






END PLUG

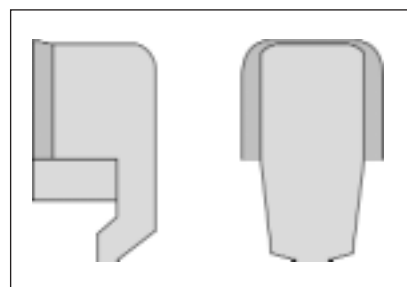

STANDARD SIZES height x width x thickness	HORIZONTAL PITCH	VERTICAL PITCH	WEIGHT
3000 x 1250 x 3 mm	125 mm	100 mm	30 kg
2500 x 1250 x 3 mm	125 mm	100 mm	26 kg
3000 x 1250 x 3 mm	833 mm	100 mm	30 kg
2500 x 1250 x 3 mm	833 mm	100 mm	26 kg
3000 x 1200 x 3 mm	100 mm	100 mm	28 kg
2500 x 1200 x 3 mm	100 mm	100 mm	24 kg
3000 x 1200 x 3 mm	75 mm	100 mm	28 kg
2500 x 1200 x 3 mm	75 mm	100 mm	24 kg



GARMENT TRANSPORT

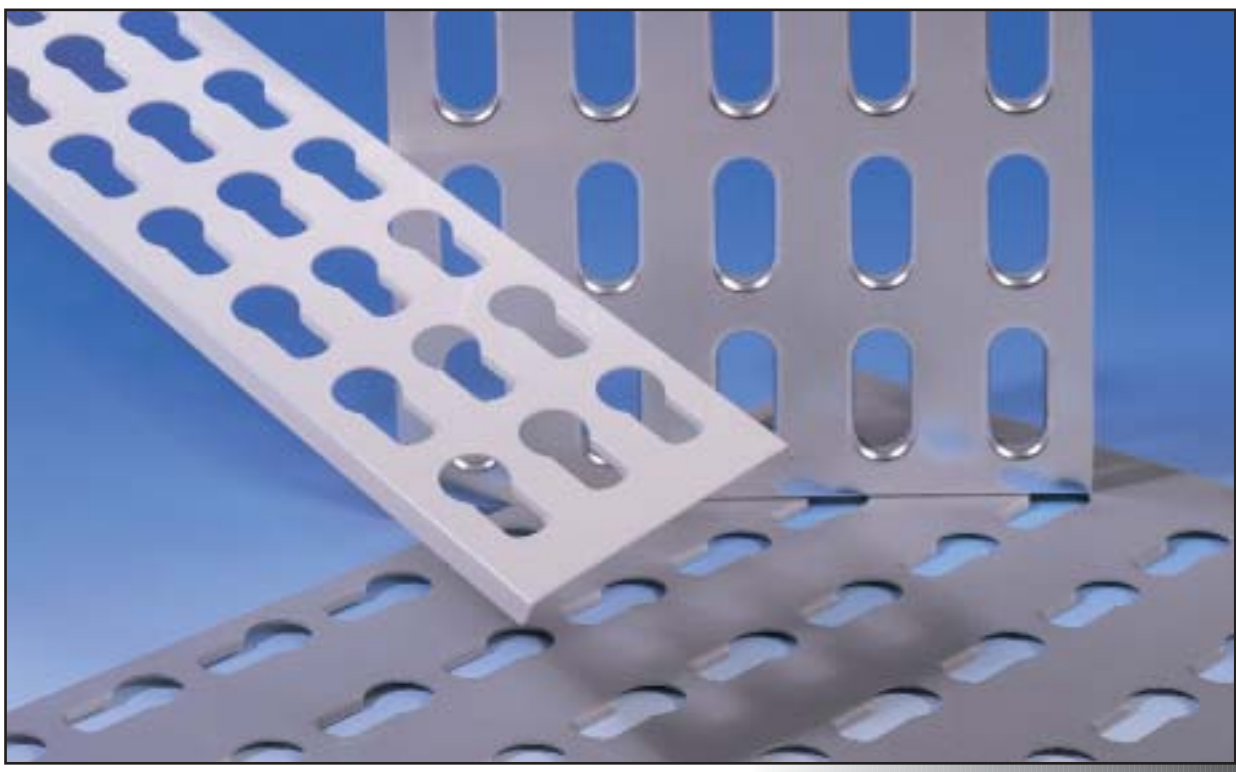


LOAD-LOK KEYHOLE PANELS

Load-Lok Keyhole panels are available in many variations and are designed to meet the individual requirements of the customer. Standard Keyhole panels are 3mm thick anodised aluminium. 2mm thick mild steel zinc plated panels are also available. The chart below details the 'Standard' panel sizes and pitch. In addition, our CNC facility allows complete design flexibility and enables us to produce standard rectangular and 'shaped' panels up to 1.5 metre wide with varying hole density (pitch) and design.

Keyhole panels should be installed allowing a minimum gap of 21mm between the rear of the panel and the trailer wall to ensure easy insertion and removal of the garment rail.



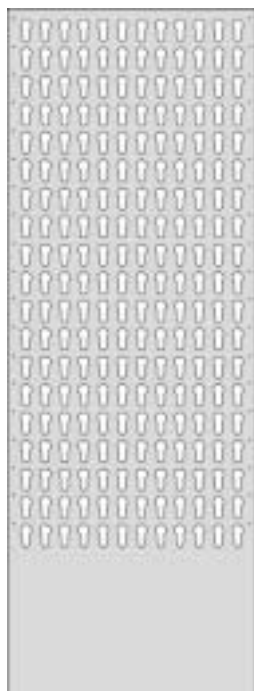


END PLUG

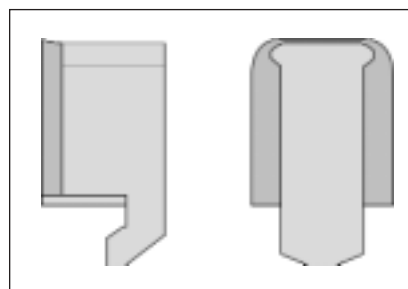



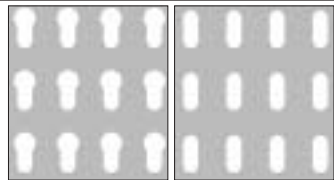
STANDARD SIZES height x width x thickness	HORIZONTAL PITCH	VERTICAL PITCH	WEIGHT
3100 x 1118 x 3 mm	60 mm	80 mm	24 kg
2850 x 1118 x 3 mm	60 mm	80 mm	21 kg
2500 x 1118 x 3 mm	60 mm	80 mm	19 kg

GARMENT TRANSPORT

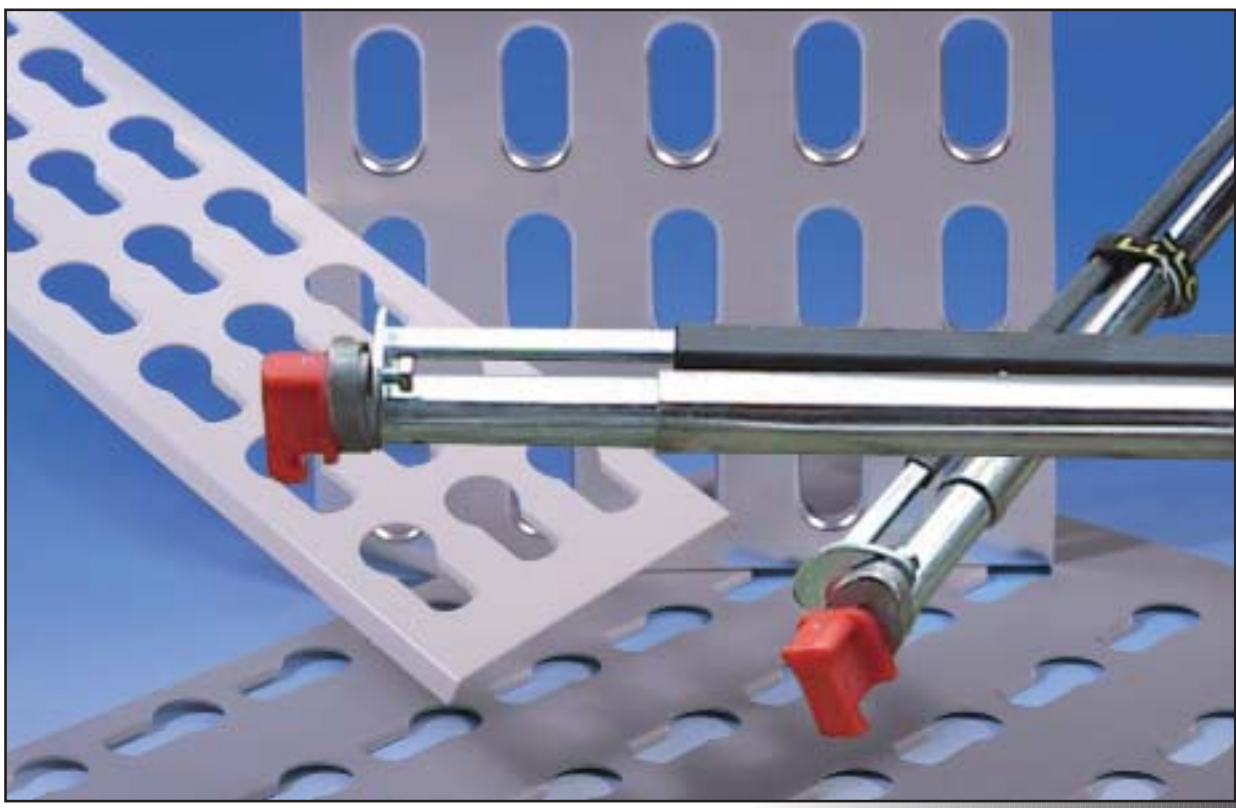

Alle Load-Lok kledingstangen zijn vervaardigd uit zéér hoogwaardig staal en uitzonderlijk laag in gewicht.

GARMENT RAIL 'COMBI'

Dim.	Type	Suitable for track-to-track	Art.nr.	Material	Carrying Capacity	Weight	Suitable for both GTS panel and Keyhole panel
Toprail ☑ 15 Hanger Rail Ø 35	Full capacity + Push spring	2420 - 2510 mm (Standard)	452COMBI	HY steel, Chromium or ZincPlated. Toprail PVC coated.	300 kg	6 ⁷ kg	
		2474 - 2564 mm (EL)	453COMBI				