



29. PIPE GRABS



30. BEAM CLAMPS



31. BARRIER GRABS/CURB GRABS



**CROSBY CLAMP-CO**

- PIPE GRABS** 29. Cylindrical objects
- BEAM CLAMPS** 30. Wide flange beam sections and plate girders
- BARRIER GRABS/CURB GRABS** 31. Concrete road barriers and granite curbs



Pipe Grabs



Tlf./Phone +47 63 87 10 80 www.transportutstyr.no

## FOR CYLINDRICAL OBJECTS

Crosby Clamp-Co Pipe Grabs provide an excellent means of handling cylindrical objects as long as they meet "Pipe O.D." and "Working Load Limits" referenced in the table below.

Additional sizes available upon request.

Pipe grab sizes listed will handle all classes in a category of ASA standard cast iron pipe, C900, Yellowmine, Schedule 40, 80 & 120 PVC or ASA standard steel welded and seamless pipe.

Standard, extra strong and double extra all have the same outside diameter.

Dimensions in mm

### For Cast Iron Pipe C-900, C-905, Bluestripe C-906, Certa-Lok PVC Pressure Pipe

Model	CCPG-900 Stock No.	WLL (kg.)	Pipe O.D.	Weight Each (kg.)	Jaw A	B	C
C-3	2730000	204	102	4,54	127	254	152
C-4	2730009	272	122	5,0	203	356	178
C-6	2730018	454	175	6,80	279	432	279
C-8	2730027	635	230	11,3	330	559	256
C-10	2730036	907	282	21,8	381	686	432
C-12	2730045	1134	335	32,7	457	813	508
C-14	2730054	1588	389	47,6	559	965	584
C-16	2730063	1814	442	59,0	610	1067	635
C-18	2730072	2268	495	77,1	660	1143	711
C-20	2730081	2948	549	95,3	711	1270	813
C-24	2730090	3175	655	102	787	1473	889

\* Ultimate load is 5 times the Working Load Limit

### For Steel Pipe SDR Class 200, Yellowmine, PVC Schedule 40, 80 & 120



Model	CCPG-900 Stock No.	WLL (kg.)	Pipe O.D.	Weight Each (kg.)	Jaw A	B	C
S-3	2731000	204	88,9	4,54	127	254	152
S-4	2731009	272	114	5,0	203	356	178
S-6	2731018	454	168	6,8	279	432	279
S-8	2731027	635	219	11,3	330	559	356
S-10	2731036	907	273	21,8	381	686	432
S-12	2731045	1134	324	32,7	457	813	508
S-14	2731054	1588	356	47,6	559	965	584
S-16	2731063	1814	406	59,0	610	1067	635
S-18	2731072	2268	457	77,1	660	1143	711
S-20	2731081	2948	508	95,3	711	1270	813
S-24	2731090	3175	610	102	787	1473	889

\* Ultimate load is 5 times the Working Load Limit

Tlf./Phone +47 63 87 10 80 www.transportutstyr.no



- Available in capacities of 204 kg. 3175 kg. (450 to 7000 lbs.).
- Moveable outriggers help stabilize the load.
- No blocking of load required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Designed to handle loads of various types of material, including:
  - Cast Iron
  - Steel
  - PVC
  - C900
  - Yellowmine Ductile Iron
  - Cement Pipe
- Finish - Red Paint.
- Custom sizes are available.
- All sizes are RFID EQUIPPED.

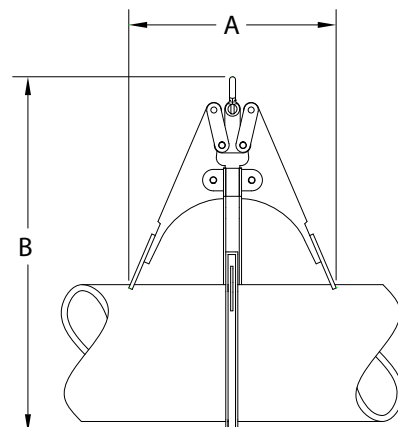

Dimensions in inches

**For Cast Iron Pipe C-900, C-905, Bluestripe C-906, Certa-Lok PVC Pressure Pipe**

Model	CCPG-900 Stock No.	WLL (lbs.)	Pipe O.D.	Weight Each (lbs.)	Jaw A	B	C
C-3	2730000	450	4	10	5	10	6
C-4	2730009	600	4.8	11	8	14	7
C-6	2730018	1000	6.9	15	11	17	11
C-8	2730027	1400	9.05	25	13	22	14
C-10	2730036	2000	11.1	48	15	27	17
C-12	2730045	2500	13.2	72	18	32	20
C-14	2730054	3500	15.3	105	22	38	23
C-16	2730063	4000	17.4	130	24	42	25
C-18	2730072	5000	19.5	170	26	45	28
C-20	2730081	6500	21.6	210	28	50	32
C-24	2730090	7000	25.8	225	31	58	35

\* Ultimate load is 5 times the Working Load Limit

**For Steel Pipe SDR Class 200, Yellowmine, PVC Schedule 40, 80 & 120**

Model	CCPG-900 Stock No.	WLL (lbs.)	Pipe O.D.	Weight Each (lbs.)	Jaw A	B	C
S-3	2731000	450	3.5	10	5	10	6
S-4	2731009	600	4.5	11	8	14	7
S-6	2731018	1000	6.63	15	11	17	11
S-8	2731027	1400	8.63	25	13	22	14
S-10	2731036	2000	10.75	48	15	27	17
S-12	2731045	2500	12.75	72	18	32	20
S-14	2731054	3500	14	105	22	38	23
S-16	2731063	4000	16	130	24	42	25
S-18	2731072	5000	18	170	26	45	28
S-20	2731081	6500	20	210	28	50	32
S-24	2731090	7000	24	225	31	58	35

\* Ultimate load is 5 times the Working Load Limit





beam clamp




Tlf./Phone +47 63 87 10 80 www.transportstyr.no

## FOR HANDLING WIDE FLANGE BEAM SECTIONS AND PLATE GIRDERS

Crosby Clamp-Co Beam Clamps provide an efficient method for handling wide flange beam sections and plate girders. When lifting, these beam clamps grip the beam at three points, and when properly balanced and safely guided, the beam can be handled even if the clamp is slightly off center lengthwise.

**NOTE:** Control the beam at all times. Beams should be gripped as near the center as possible. Snubbing lines at each end must be used to control excessive twisting or swinging, and to guide the beam to its proper place. Each lifting situation may have a specific demand which should be addressed before lifting.

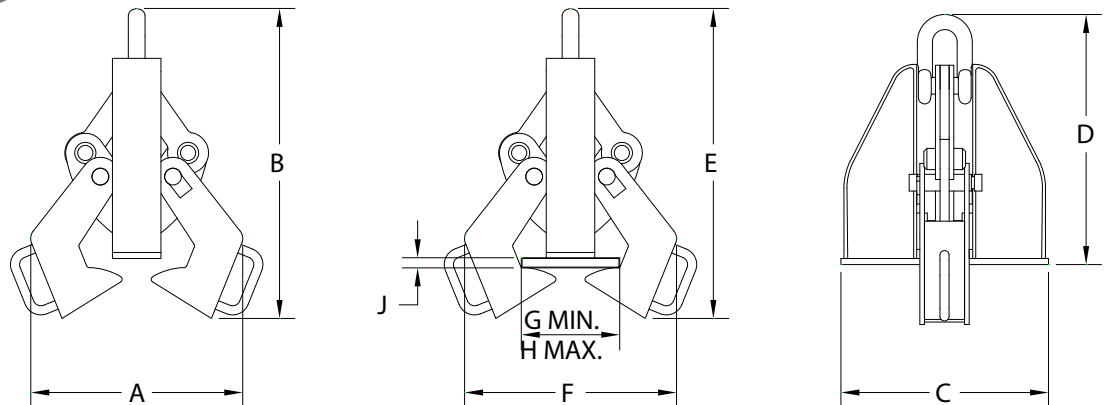

Dimensions in mm

Model	BCFG Stock No.	WLL Each (t.)	Flange Grip Range		Weight Each (kg.)	A	B	C	D	E	F	G	H	J
			Width	Thickness										
F - 5	2732000	4,54	102 - 254	13 - 25	31,8	241	660	305	508	648	406	19,1	102	25,4
F - 15	2732009	13,6	178 - 432	13 - 51	69,4	394	864	432	686	876	635	178	432	50,8
NS - 15	2732018	13,6	178 - 432	13 - 51	69,4	394	864	432	686	876	635	178	432	50,8
F - 25	2732027	22,7	406 - 610	25 - 76	132	584	1219	565	914	1346	946	406	610	76,2
NS - 25	2732036	22,7	406 - 610	25 - 76	132	584	1219	565	914	1346	946	406	610	76,2
F - 35	2732045	31,8	406 - 914	41 - 102	235	762	1626	699	1219	1473	1346	406	914	102
NS - 35	2732054	31,8	406 - 914	41 - 102	235	762	1626	699	1219	1473	1346	406	914	102


\* Ultimate load is 5 times the Working Load Limit

Base Stock No.	Base Dimensions						
	C	L	M	N	P	S	T
F - 5	343	-	-	-	-	76,2	-
F - 15	432	-	-	-	-	102	-
NS - 15	432	12,7	165	114	19,1	102	63,5
F - 25	565	-	-	-	-	140	-
NS - 25	565	19,1	197	165	19,1	140	102
F - 35	699	-	-	-	-	152	-
NS - 35	699	19,1	229	216	19,1	152	114

Tlf./Phone +47 63 87 10 80 www.transportutstyr.no



- Available in capacities of 5 thru 35 metric tons.
- Eliminates the need for slings, chokers, and spreader bars.
- When applied to load, the tongs automatically open and slide under the flange of the beam.
- Center plate and gripping tongs work together - the heavier the beam, the greater the clamping pressure.
- Model "NS" clamps have a recessed base to accept studs welded to the beam surface.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Finish - Red Paint.
- All sizes are RFID EQUIPPED.

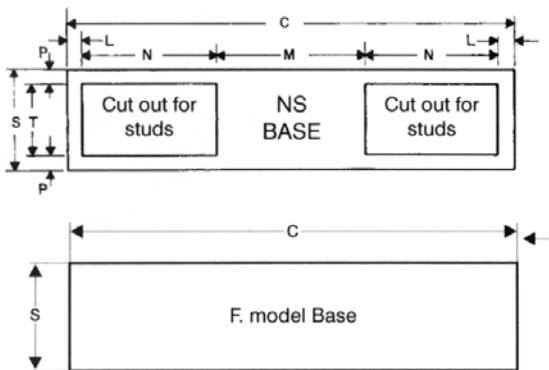

Dimensions in inches

Model	BCFG Stock No.	WLL Each (t.)	Flange Grip Range		Weight Each (lbs)	A	B	C	D	E	F	G	H	J
			Width	Thickness										
F - 5	2732000	4.54	4 - 10	.5 - 1	70	9.50	26.00	12.00	20.00	25.50	16.00	.75	4.00	1.00
F - 15	2732009	13.6	7 - 17	.5 - 2	153	15.50	34.00	17.00	27.00	34.50	25.00	7.00	17.00	2.00
NS - 15	2732018	13.6	7 - 17	.5 - 2	153	15.50	34.00	17.00	27.00	34.50	25.00	7.00	17.00	2.00
F - 25	2732027	22.7	16 - 24	1 - 3	291	23.00	48.00	22.25	36.00	53.00	37.25	16.00	24.00	3.00
NS - 25	2732036	22.7	16 - 24	1 - 3	291	23.00	48.00	22.25	36.00	53.00	37.25	16.00	24.00	3.00
F - 35	2732045	31.8	16 - 36	1.63 - 4	518	30.00	64.00	27.50	48.00	58.00	53.00	16.00	36.00	4.00
NS - 35	2732054	31.8	16 - 36	1.63 - 4	518	30.00	64.00	27.50	48.00	58.00	53.00	16.00	36.00	4.00

\* Ultimate load is 5 times the Working Load Limit

Base Stock No.	Base Dimensions						
	C	L	M	N	P	S	T
F - 5	13.50	-	-	-	-	3.00	-
F - 15	17.00	-	-	-	-	4.00	-
NS - 15	17.00	.50	6.50	4.50	.75	4.00	2.50
F - 25	22.25	-	-	-	-	5.50	-
NS - 25	22.25	.75	7.75	6.50	.75	5.50	4.00
F - 35	27.50	-	-	-	-	6.00	-
NS - 35	27.50	.75	9.00	8.50	.75	6.00	4.50



Barrier Grab





Tlf./Phone +47 63 87 10 80 www.transportstyr.no

## CONCRETE ROAD BARRIERS

Crosby Clamp-Co Barrier Grabs provide a fast and efficient method for handling concrete road barriers.

- Hands-free operation.
- Alloy Steel Construction.
- Available with polyurethane pads or hardened steel jaw (Replacement kits available).
- Eliminates the need for slings, chokers and spreader bars.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Finish - Red Paint.
- All sizes are RFID EQUIPPED.

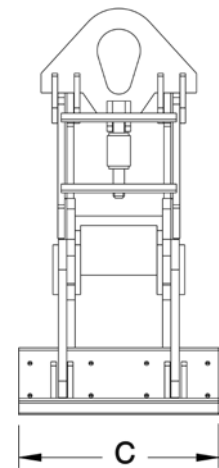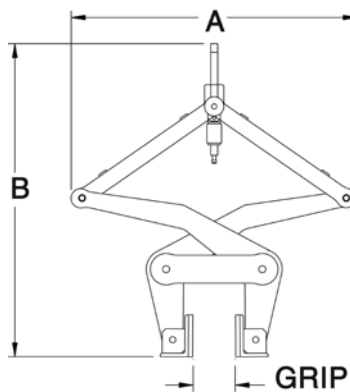

Dimensions in mm

Model	CCBG-150 Stock No.	WLL (t.)	Grip width	Weight Each (kg.)	A	B	C
BG-9000	2734009	4,08	152 - 305	132	1038	1140	457

Dimensions in inches

Model	CCBG-150 Stock No.	WLL (t.)	Grip width	Weight Each (lbs.)	A	B	C
BG-9000	2734009	4.5	6 - 12	291	40.88	44.88	18.00

\*Ultimate load is 5 times the Working Load Limit

Tlf./Phone +47 63 87 10 80 www.transportutstyr.no




**GRANITE CURBS**

Crosby Clamp-Co Curb Grabs provide a fast and efficient method for handling large granite curbs.

- Virtually no manual assistance is required.
- Alloy Steel Construction.
- Eliminates the need for slings, chokers and spreader bars.
- Available with polyurethane pads or hardened steel jaw (Replacement kits available).
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Finish - Red Paint.
- All sizes are RFID EQUIPPED.



Curb Grab

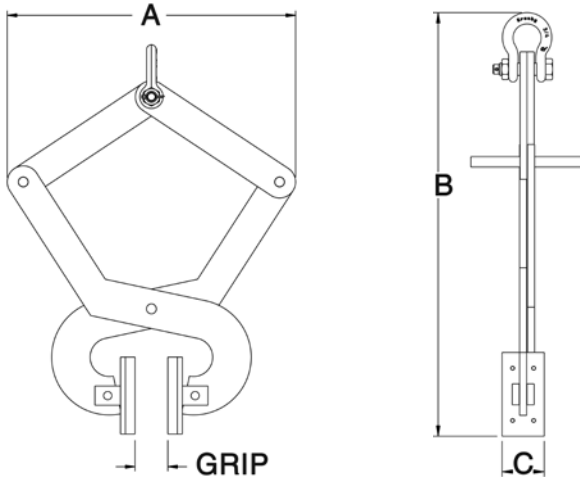

**Dimensions in mm**

Model	CCBG-150 Stock No.	WLL (kg.)	Grip width	Weight Each (kg.)	A	B	C
CG-1400	2734000	635	102 - 178	16,8	565	683	254

**Dimensions in inches**

Model	CCBG-150 Stock No.	WLL (lbs.)	Grip width	Weight Each (lbs.)	A	B	C
CG-1400	2734000	1400	4 - 7	37.0	22.25	26.88	10.00

\* Ultimate load is 5 times the Working Load Limit